

**botech**<sup>®</sup>


DEEP HOLE DRILLING SYSTEMS  
SOLID CARBIDE TOOLS

## 2-Flute Drills

Type 120, 122  
123, 125



botech

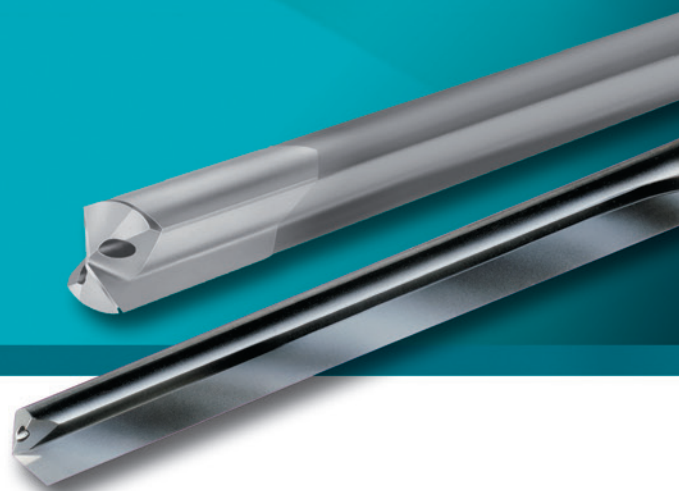

## The botek company

Manufacturing deep and precise holes is a technical challenge when processing metal. Accordingly specialising in deep hole drilling technology was the founding idea in 1974 of botek Präzisionsbohrtechnik GmbH in Riederich.

Botek grew to be an international supplier of deep hole drilling tools. Over 550 employees in the main company develop and manufacture single and two fluted tools, deep hole drilling tools BTA and Ejector systems as well as special tools.

A complete product program, regarding all deep hole drilling aspects and a team of highly qualified and dedicated cutting specialists make botek a competent partner for the automobile industry and their suppliers, shipbuilding industry, hydraulic industry as well as motor, gear and machine building companies.



- Please note our safety pointers at [www.botek.de](http://www.botek.de).
- Our General Standard Terms and Conditions, which we assume as known, apply.
- We reserve the right to make modifications in the interest of technical improvement. Such modifications cannot, in principle, be accepted as justifiable reasons for complaints.
- Subject to change. The manufacturer accepts no responsibility for misprints and other errors.

© botek Präzisionsbohrtechnik GmbH



## **Contents**

- p. 2 The botek company
- p. 2 Important information
- p. 3 Contents

## **Tools**

- p. 4 Advantages
- p. 5 The gundrilling process and the requirements for application

## **Solid carbide 2-flute drills**

Type 123

- p. 6 Overview
- p. 6 Tool design
- p. 6 Nose grind geometry
- p. 7 Shank / Driver (overview)
- p. 8 Technical information

## **2-flute drills with brazed carbide tip**

Type 120 / Type 122 / Type 125

- p. 9 Overview
- p. 9 Tool design
- p. 9 Standard nose grind
- p. 10 Driver
- p. 11 Driver
- p. 12 Technical information

## **Technical appendix**

- p. 13 Regrinding instruction for standard nose grind Type 120 / Type 123
- p. 14 Service
- p. 15 Accessories
- p. 16 Machining accessories, Axial-Pulsator
- p. 17 Drilling quality
- p. 18 Application notes

## **Inquiry / Order**

- p. 19 Inquiry form / Order form

## Advantages

1. Cost effective and precise holemaking.
2. Higher feed rate possible.
3. Best drilling quality.
4. High process reliability.
5. Tool lengths up to 1,200 mm – depending on tool type and tool diameter.
6. Suitable for use on machining centres and turning machines with high pressure coolant system.
7. Minimum quantity lubrication (MQL) possible under certain conditions.
8. Drills can be used horizontally or vertically with either tool, workpiece or counterrotation.
9. Tools can be reground – at botek or in your facility.
10. Ideally suited to drill short chipping materials like Alu-alloys and cast iron.
11. Nose grinds with chip breaker for optimum chip formation available.
12. With the botek „Axial-Pulsator“ drill Type 120 and 123 are also suitable drilling steel and other long chipping materials.
13. With the „Axial-Pulsator“ higher feed rates can be achieved.

### Axial-Pulsator



The botek „Axial-Pulsator“ has been developed to increase the feed rate of straight fluted deep hole drilling tools, particularly drilling steel and other long chipping materials.


For additional information please refer to page 16.

# The gundrilling process and the requirements for application

The characteristic of the 2-flute drilling process is that coolant is fed through the coolant holes in the tool and exits along with the chips in the flutes from the drilled hole. The coolant also provides lubrication to the drill periphery.

## Conditions for successful deep hole drilling

1. An efficient coolant and filtration system with a filtration of 20  $\mu\text{m}$  to 30  $\mu\text{m}$  (the smaller the diameter, the better the coolant and filtration should be).
2. Suitable coolant, i. e. deep hole drilling oil or emulsion (min. 10-12 % concentration, with e. p. additives) has to be provided in sufficient quantity and pressure. Minimum quantity lubrication (MQL) may be used under certain conditions.
3. Drill guiding through drill bush or pilot hole in the workpiece.

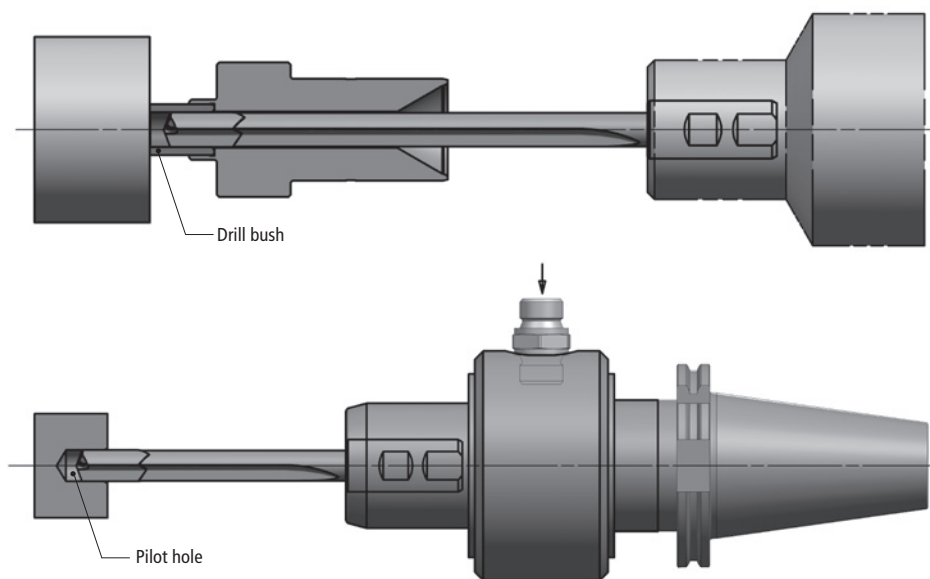

The 2-flute gundrill is not self centering. When positioning the drill, the tool must be guided through a drill bush or a pilot hole. The quality of the pilot hole affects the drilling performance. Solid carbide 2-fluted drills (Type 123) can up to a length of 12 x D also be used without a pilot hole, but with reduced starting parameters (see page 8).

## Dimensions for the guide hole




	Drill diameter (mm)	Dimensions for guide hole (pilot hole)	
		L (mm)	D (mm) ISO Tolerance F7
	2.800 - 6.000 mm	ca. 1.5 x D	+ 0.010 to 0.022
	6.001 - 10.000 mm		+ 0.013 to 0.028
	10.001 - 18.000 mm	ca. 1.0 x D	+ 0.016 to 0.034
	18.001 - 32.000 mm		+ 0.020 to 0.041

For precise holes we recommend to use the ISO tolerance G6. The dimensions specified in the table are guide values. To avoid chipping to the cutting edge, a chamfered pilot hole (F) is recommended depending on the machining requirements. Please refer to application notes on page 18.

# Solid carbide 2-flute drills


## Type 123

### Overview

Type	Tool diameter	
<b>Type 123</b> Solid carbide 2-flute drill coolant fed double margin	tool diameter <b>2.800 – 32.000 mm</b>	
<b>Type 123-01</b> Solid carbide 2-flute drill for taps, coolant fed, step angle 90°	tool diameter <b>2.800 – 32.000 mm</b>	
<b>Type 123-02</b> Solid carbide 2-flute step drill for taps, coolant fed, step angle 180°	tool diameter <b>2.800 – 32.000 mm</b>	
Type 123 with PCD cutting edge available on request		

### Tool design


Drill and head shaft are manufactured from a single piece of carbide blank. The advantage of this tool is high process reliability and performance. Longer tool life is possible due to reduced torsional vibrations and higher rigidity.

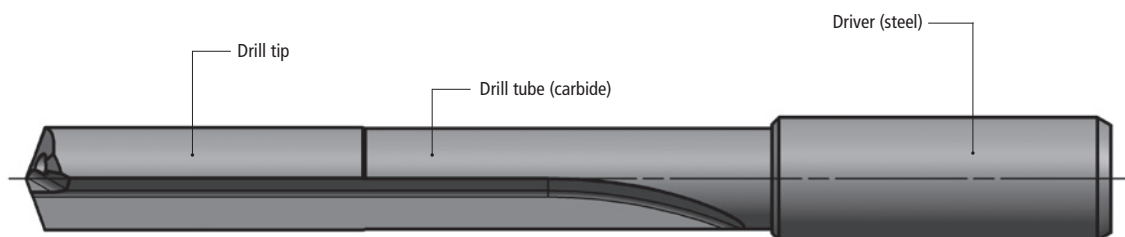

### Nose grind geometry

The nose grind geometry affect the following, hole tolerance, chip formation, coolant pressure and flow, tool life, centreline deviation and surface quality. Over the years, botek has successfully tested a number of different nose grinds for drilling various materials.

botek's experience has formed the foundation for the development of our standard nose grind geometries. This meets the requirements of most drilling applications. Drilling of especially long chipping materials and difficult to machine materials usually call for special nose grind geometries, and in some cases, made to order chip breakers, all available from botek.





→ Instructions for regrounding: see page 13.

# Solid carbide 2-flute drills

## Type 123

### Shank / Driver

Shank	DCON	Driver	DCON (mm)	L Driver (mm)
DIN 6535 HAK	6 8 10 12 14 16 18 20 25 32	DIN 6535 HAK LS	10 12 16 20 25	40 45 48 50 56
DIN 6535 HBK	6 8 10 12 14 16 18 20	DIN 6535 HBK	10 12 16 20 25	40 45 48 50 56
	25 32	LS	32 40	60 70
DIN 6535 HEK	6 8 10 12 14 16 18 20 25 32	LS	10 12 16 20 25 32 40	40 45 48 50 56 60 70
		Special driver	as per drawing	as per drawing

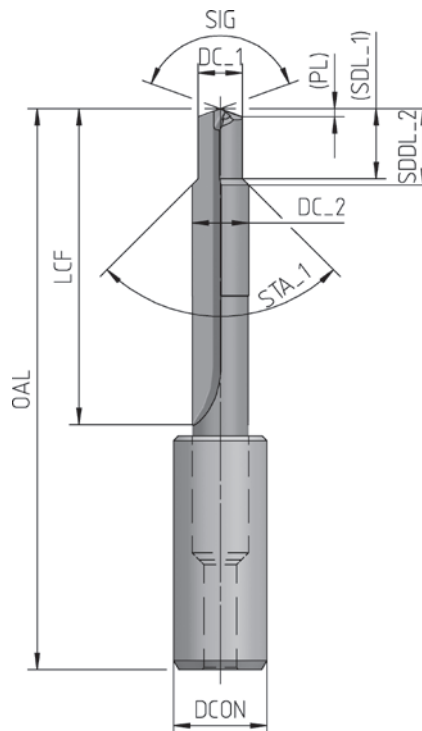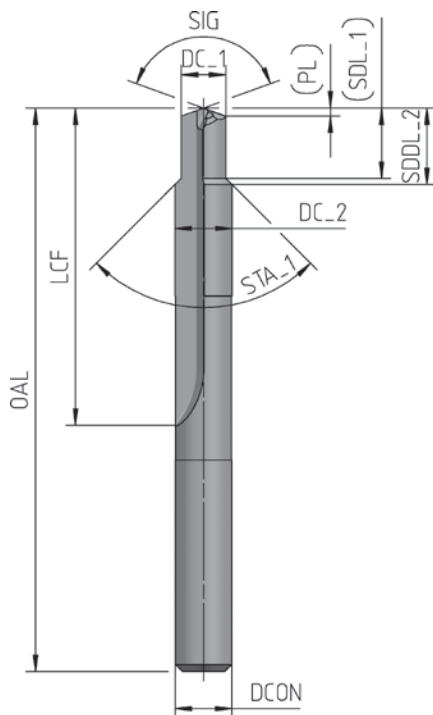

### Cutting tool data according to ISO 13399

SIG	=	Point angle
DC	=	Cutting diameter
PL	=	Point length
LCF	=	Length chip flute
LS	=	Shank length
OAL	=	Overall length
DCON	=	Connection diameter

### Please note:

- DIN 6535 HAK is standard. Other shank or driver designs on request only.
- All shaft forms with optimized tolerance suitable for hydraulic chucks.

## Technical information

### Solid carbide 2-flute drills Type 123


#### Guide values for drilling of various materials with solid carbide 2-flute drill Type 123

Material	Mechanical strength	Examples	Cutting speed Vc (m/min), Values for drill guided with pilot hole	Cutting speed Vc (m/min), Adjusted Values for drill used without pilot hole				Feed rate f (mm), referred to tool diameter				
				3 x D	5 x D	8 x D	12 x D	3.0-4.99	5.0-7.99	8.0-11.99	12.0-15.99	16.0-20.0
General steel castings	≤ 600 N/mm <sup>2</sup>	GS 38	30 - 60	27.0 - 54.0	24 - 48	21.0 - 42.0	18 - 36	0.05 - 0.15	0.05 - 0.20	0.10 - 0.22	0.10 - 0.25	0.10 - 0.28
	≤ 700 N/mm <sup>2</sup>	GS 52	25 - 50	22.5 - 45.0	20 - 40	17.5 - 35.0	15 - 30	0.04 - 0.10	0.05 - 0.16	0.05 - 0.19	0.08 - 0.20	0.08 - 0.22
	> 700 N/mm <sup>2</sup>	GS 62	20 - 45	18.0 - 40.5	16 - 36	14.0 - 31.5	12 - 27	0.04 - 0.10	0.05 - 0.16	0.05 - 0.19	0.08 - 0.20	0.08 - 0.22
Cast iron/ Grey cast iron	≤ 200 HB	GG 30	70 - 115	63.0 - 103.5	56 - 92	49.0 - 80.5	42 - 69	0.10 - 0.25	0.15 - 0.32	0.20 - 0.40	0.25 - 0.45	0.30 - 0.50
		GGG 50	70 - 115	63.0 - 103.5	56 - 92	49.0 - 80.5	42 - 69	0.10 - 0.25	0.15 - 0.32	0.20 - 0.40	0.25 - 0.45	0.30 - 0.50
		GTW 40	70 - 115	63.0 - 103.5	56 - 92	49.0 - 80.5	42 - 69	0.10 - 0.25	0.15 - 0.32	0.20 - 0.40	0.25 - 0.45	0.30 - 0.50
	≤ 250 HB	GG 30	60 - 95	54.0 - 85.5	48 - 76	42.0 - 66.5	36 - 57	0.10 - 0.20	0.12 - 0.25	0.15 - 0.35	0.20 - 0.40	0.25 - 0.45
		GGG 50	60 - 95	54.0 - 85.5	48 - 76	42.0 - 66.5	36 - 57	0.10 - 0.20	0.12 - 0.25	0.15 - 0.35	0.20 - 0.40	0.25 - 0.45
		GTW 400	60 - 95	54.0 - 85.5	48 - 76	42.0 - 66.5	36 - 57	0.10 - 0.20	0.12 - 0.25	0.15 - 0.35	0.20 - 0.40	0.25 - 0.45
	> 250 HB	GG 40	50 - 80	45.0 - 72.0	40 - 64	35.0 - 56.0	30 - 48	0.10 - 0.20	0.12 - 0.25	0.15 - 0.35	0.20 - 0.40	0.25 - 0.45
		GGG 70	50 - 80	45.0 - 72.0	40 - 64	35.0 - 56.0	30 - 48	0.10 - 0.20	0.12 - 0.25	0.15 - 0.35	0.20 - 0.40	0.25 - 0.45
		GTS 70	50 - 80	45.0 - 72.0	40 - 64	35.0 - 56.0	30 - 48	0.10 - 0.20	0.12 - 0.25	0.15 - 0.35	0.20 - 0.40	0.25 - 0.45
	350 HB		20 - 55	18.0 - 49.5	16 - 44	14.0 - 38.5	12 - 33	0.04 - 0.10	0.06 - 0.12	0.08 - 0.15	0.08 - 0.15	0.10 - 0.20
			20 - 55	18.0 - 49.5	16 - 44	14.0 - 38.5	12 - 33	0.04 - 0.10	0.06 - 0.12	0.08 - 0.15	0.08 - 0.15	0.10 - 0.20
	450 HB		20 - 55	18.0 - 49.5	16 - 44	14.0 - 38.5	12 - 33	0.04 - 0.10	0.06 - 0.12	0.08 - 0.15	0.08 - 0.15	0.10 - 0.20
			20 - 55	18.0 - 49.5	16 - 44	14.0 - 38.5	12 - 33	0.04 - 0.10	0.06 - 0.12	0.08 - 0.15	0.08 - 0.15	0.10 - 0.20
Copper Bronze Brass Plastics		Copper	60 - 220	54.0 - 198.0	48 - 176	42.0 - 154.0	36 - 132	0.07 - 0.18	0.12 - 0.25	0.20 - 0.35	0.25 - 0.45	0.30 - 0.50
		Bronze	60 - 220	54.0 - 198.0	48 - 176	42.0 - 154.0	36 - 132	0.07 - 0.18	0.12 - 0.25	0.20 - 0.35	0.25 - 0.45	0.30 - 0.50
		Brass	60 - 220	54.0 - 198.0	48 - 176	42.0 - 154.0	36 - 132	0.07 - 0.18	0.12 - 0.25	0.20 - 0.35	0.25 - 0.45	0.30 - 0.50
Aluminium		< 10% Si	80 - 300	72.0 - 270.0	64 - 240	56.0 - 210.0	48 - 180	0.20 - 0.40	0.20 - 0.40	0.20 - 0.40	0.20 - 0.40	0.20 - 0.40
Aluminium		> 10% Si	70 - 200	63.0 - 180.0	56 - 160	49.0 - 140.0	42 - 120	0.10 - 0.25	0.15 - 0.35	0.25 - 0.45	0.30 - 0.50	0.35 - 0.55

#### Please note:

- The guide values mentioned in the cutting parameter tables apply only when using hydraulic chucks and providing good chip removal.
- Coated drills may produce different chip formation (often longer chips).
- When restarting we recommend an average cutting force Vc (m/rev.), that can be optimized later.
- Use adequate feed rate to produce short but not compressed chips.
- Please see page 12 for further coolant and filtration information.
- High cutting efficiency is only possible if troublefree chip evacuation is guaranteed (see coolant diagram).

#### Coolant pressure and Coolant quantity

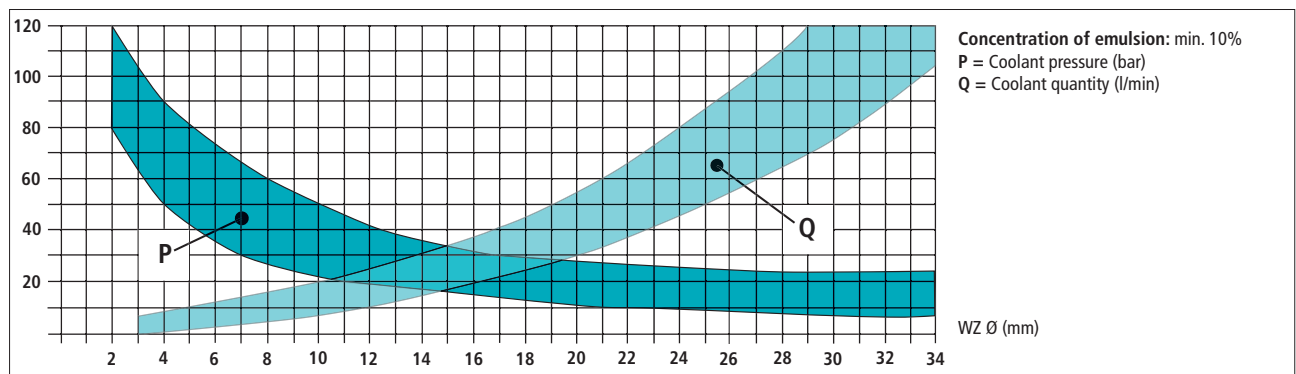





#### Please note:

- High alignment precision and surface quality are only achievable, if the tool is clamped optimally (hydraulic chuck), which means the concentricity of the tool must not exceed 0,015 mm once clamped. Please check the concentricity regularly.
- Reduced feed rate during interrupted cut, cross holes and angle entry or exit.




## 2-flute drills with brazed carbide tip Type 120/Type 122/Type 125

### Overview

Type	Tool diameter	
<b>Type 120</b> 2-flute drill with solid carbide tip	tool diameter <b>6.000 – 26.500 mm</b> larger dia. on request	
<b>Type 122</b> 2-flute stepped solid drilling tool with solid carbide tip	tool diameter <b>4.510 – 26.500 mm</b>	
<b>Type 125</b> 2-flute counterboring tool with solid carbide tip	tool diameter <b>4.000 – 40.000 mm</b>	
<b>Type 125-03</b> 2-flute counterboring tool with guiding pilot with solid carbide tip and steel shank	tool diameter <b>6.000 – 40.000 mm</b>	
Type 120 with PCD cutting edge available on request		

### Tool design


The botek 2-flute drill is fabricated with a drill head section of solid carbide tip, which is brazed to a heat treated tube (flute) section then fitted and brazed to a hardened and ground steel driver.

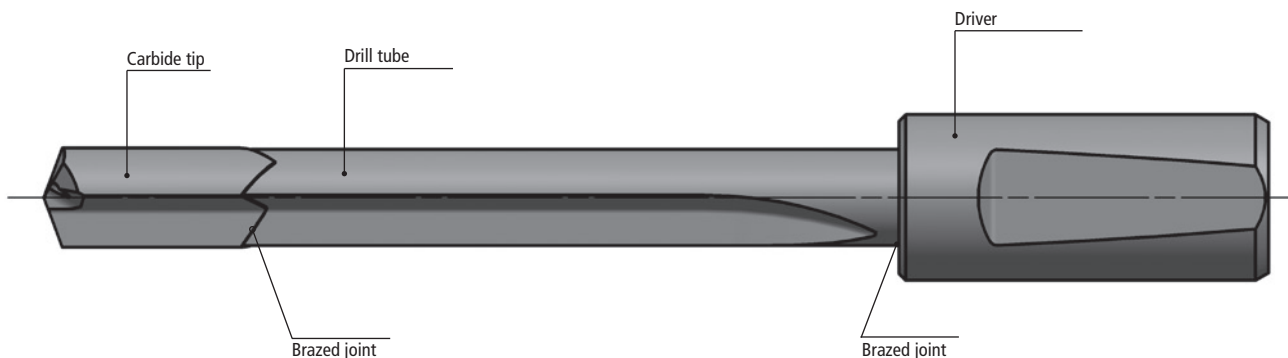

### Standard nose grind

The nose grind geometry affects the following: hole tolerance, chip formation, coolant pressure and flow, tool life, centreline deviation and surface quality. Over the years, botek has successfully tested a number of different nose grinds for drilling various materials.

botek's experience has formed the foundation for the development of our standard nose grind geometries. This meets the requirements of most drilling applications. Deep-hole drilling of especially long chipping materials and difficult to machine materials usually call for special nose grind geometries, and in some cases, made to order chip breakers, all available from botek.

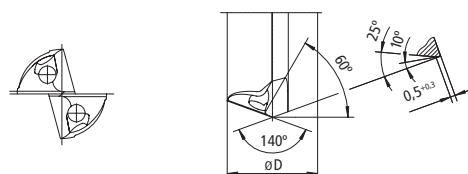

→ Instructions for regrinding: see page 13.












## 2-flute drills with brazed carbide tip

Type 120/Type 122/Type 125

### 3. Driver

2-flute drills are typically provided with a driver for holding the tool in the machine spindle.  
The driver transmits the torque from the machine spindle.  
brotek provides a variety of standard drivers from stock as well as customer specific configurations.

#### Standard drivers for 2-flute gundrills with brazed carbide tip – Overview

Designation		Drawing	brotek order no.	for tool length calculation			X = Notch location	M = Thread size
DCON Driver Ø (mm)	Type			Drill dia. range (mm) from - to	LSC Driver	LS Driver with pin		
10			ZH10-00	1.850 - 7.299	40		24.0	
16			ZH16-03	1.850 - 12.399	45	53	31.0	
25			ZH25-00	7.300 - 19.509	70	78	34.0	
10	with pin		ZH10-01	7.300 - 12.399	40	57	24.0	
16			ZH16-04	12.400 - 20.500	45	72	31.0	
25	with pin and drive key		ZH25-01	19.510 - >	70	105	34.0	
16			ZH16-02	1.850 - 12.399	50	58	47.5	
16	with pin		ZH16-33	12.400 - 20.509	50	77	47.5	
10	GKT with metr. thread		ZH10-06	1.850 - 7.299	60			M6x0.5
16			ZH16-15	1.850 - 12.399	80			M10x1
25			ZH25-08	6.000 - 19.509	100			M16x1.5
10	GKT with metr. thread with pin		ZH10-28	7.300 - 12.399	60	77		M6x0.5
16			ZH16-22	12.400 - 20.509	80	105		M10x1
25			ZH25-10	19.509 - >	100	140		M16x1.5
12.7	1/2" 3/4" 1" 1 1/4" 1 1/2"		ZH12,7-00	1.850 - 9.699	38,1		25.3	
19.05			ZH19,05-01	3.960 - 14.899	70		45.0	
25.4			ZH25,4-00	6.000 - 19.509	70		57.5	
31.7			ZH31,7-00	9.700 - 25.609	70		57.5	
38.1			ZH38,1-00	9.700 - 32.609	70		57.5	
19.05	3/4" 1" 1 1/4" 1 1/2"		ZH19,05-11	14.900 - 24.609	70	97	45.0	
25.4			ZH25,4-01	19.510 - >	70	100	57.5	
31.7			ZH31,7-01	25.610 - >	70	110	57.5	
38.1			ZH38,1-01	32.610 - >	70	110	57.5	
10	VDI 3208		ZH 10-44	1.850 - 6.749	60	68	35	M6x0.5
16			ZH 16-31	1.850 - 10.799	80	90	37	M10x1
25			ZH 25-34	6.000 - 19.509	100	112	45	M16x1.5
16	VDI 3208 with pin		ZH 16-66	10.800 - 16.399	80	110	37	M10x1
25			ZH 25-40	19.510 - 42.699	100	142	45	M16x1.5

DCON = Connection diameter

LSC = Clamping length

LS = Shank length

## 2-flute drills with brazed carbide tip

Type 120/Type 122/Type 125

### Standard drivers for 2-flute drills with brazed carbide tip – Overview

Designation		Drawing	brotek order no.	for tool length calculation			X = Notch location	TR = Thread size
DCON Driver Ø (mm)	Type			Drill dia. range (mm) from - to	LSC Driver	LS Driver with pin		
16	Adjustable driver with acme thread		SH16-00	1.850 - 12.899	112		73.0	TR16x1.5
20			SH20-00	1.850 - 14.899	126		82.0	TR20x2
28			SH28-00	6.000 - 21.509	126		82.0	TR28x2
36			SH36-00	8.700 - 28.609	162		109.0	TR36x2
16	Speedbit		ZH16-21	1.850 - 12.399	40		28.0	
25			ZH25-16	6.750 - 19.509	50		35.0	
35			ZH35-00	9.700 - 28.609	60		40.0	
16	Speedbit with pin		ZH16-30	12.400 - 20.509	40	67	28.0	
25			ZH25-20	19.510 - 30.609	50	77	35.0	
35			ZH35-01	28.610 - >	60	100	40.0	
10	DIN 6535-HA		ZH10-40	1.850 - 7.299	40			
12			ZH12-18	1.850 - 8.999	45			
16			ZH16-11	1.850 - 12.399	48			
20			ZH20-01	5.000 - 15.899	50			
25			ZH25-11	6.000 - 19.509	56			
32			ZH32-24	9.700 - 25.600	60			
40	DIN 1835-A40		ZH40-03	9.700 - 32.609	70			
10	DIN 6535-HA or 1835-A with pin		ZH10-41	7.300 - 12.399	40	57		
12			ZH12-19	9.000 - 15.899	45	62		
16			ZH16-20	12.400 - 20.509	48	75		
20			ZH20-60	15.900 - 25.603	50	77		
25			ZH25-21	19.510 - 42.699	56	86		
32			ZH32-23	25.610 - 45.699	60	100		
40			ZH40-04	32.610 - >	70	110		
10	DIN 6535-HB		ZH10-11	1.850 - 7.299	40		23.5	
12			ZH12-07	1.850 - 8.999	45		26.5	
16			ZH16-32	1.850 - 12.399	48		29.0	
20			ZH20-29	1.850 - 15.899	50		30.5	
25	DIN 6535-HB		ZH25-22	6.000 - 19.509	56		38.0	
32	DIN 1835-B32		ZH32-10	9.700 - 25.609	60		43.0	
40	DIN 1835-B40		ZH40-13	9.700 - 32.609	70		47.0	
50	DIN 1835-B50		ZH50-05	15.900 - 42.699	80		54.0	
10	DIN 6535-HB or 1835-B with pin		ZH10-23	7.300 - 12.399	40	57	23.5	
12			ZH12-02	9.000 - 15.899	45	62	26.5	
16			ZH16-53	12.400 - 20.509	48	75	29.0	
20			ZH20-34	15.900 - 25.609	50	77	30.5	
25			ZH25-31	19.510 - >	56	86	38.0	
32			ZH32-11	25.610 - >	60	100	43.0	
40			ZH40-14	32.610 - >	70	110	47.0	
50			ZH50-06	42.700 - >	80	120	54.0	
10	DIN 1835-E		ZH10-20	1.850 - 7.299	40		28.0	
12			ZH12-08	1.850 - 8.999	45		33.0	
16			ZH16-47	1.850 - 12.399	48		36.0	
20			ZH20-40	1.850 - 15.899	50		38.0	
25			ZH25-36	6.000 - 19.509	56		44.0	
32			ZH32-12	9.700 - 25.609	60		48.0	
40			ZH40-18	9.700 - 32.609	70		66.0	
10	DIN 1835-E with pin		ZH10-24	7.300 - 12.399	40	57	28.0	
12			ZH12-05	9.000 - 15.899	45	62	33.0	
16			ZH16-51	12.400 - 20.509	48	75	36.0	
20			ZH20-43	15.900 - 29.609	50	77	38.0	
25			ZH25-37	19.510 - >	56	86	44.0	
32			ZH32-13	25.610 - >	60	100	48.0	
40			ZH40-17	32.610 - >	70	110	66.0	
10	DIN 6535-HE		ZH10-29	1.850 - 7.299	40		28.0	
12			ZH12-13	1.850 - 8.999	45		33.0	
16			ZH16-62	1.850 - 12.399	48		36.0	
20			ZH20-55	1.850 - 15.899	50		38.0	
10	DIN 6535-HE with pin		ZH10-30	7.300 - 12.399	40	57	28.0	
12			ZH12-14	9.000 - 15.899	45	62	33.0	
16			ZH16-70	12.400 - 20.509	48	75	36.0	
20			ZH20-56	15.900 - 29.609	50	77	38.0	

DCON = Connection diameter

LSC = Clamping length

LS = Shank length

## Technical information


### 2-flute drills with brazed carbide tip Type 120/Type 122/Type 125

#### Guide values for drilling of various materials


Material groups	Cast iron Grey cast iron ( $< 300 \text{ N/mm}^2$ ) Nodular cast iron ( $< 400 \text{ N/mm}^2$ ) Malleable cast iron	Cast iron Grey cast iron ( $< 300 \text{ N/mm}^2$ ) Nodular cast iron ( $< 400 \text{ N/mm}^2$ ) Steel castings	Copper Bronze Brass Plastics „short chipping“	Aluminium + Aluminium alloys Si-content $> 5\%$ „easily workable“
Cutting speed m/min	70 - 100	60 - 90	70 - 120	100 - 180
Drill diameter (mm)	Feed rate (mm) / rev.			
	from - to	from - to	from - to	from - to
6.0 - 7.99	0.04 - 0.08	0.03 - 0.07	0.04 - 0.08	0.06 - 0.13
8.0 - 9.99	0.05 - 0.11	0.05 - 0.10	0.05 - 0.11	0.09 - 0.18
10.0 - 13.99	0.08 - 0.16	0.07 - 0.14	0.08 - 0.16	0.12 - 0.24
14.0 - 17.99	0.10 - 0.21	0.09 - 0.18	0.10 - 0.21	0.16 - 0.32
18.0 - 21.99	0.13 - 0.26	0.10 - 0.21	0.13 - 0.26	0.19 - 0.38
$> 22.0$	0.15 - 0.31	0.12 - 0.25	0.15 - 0.31	0.22 - 0.44

Cutting speed and feed rate are dependent on tool length, coolant type and materials. In addition, the stability of the machine and workpiece clamping. All figures specified are guide values.

Coolant quantity

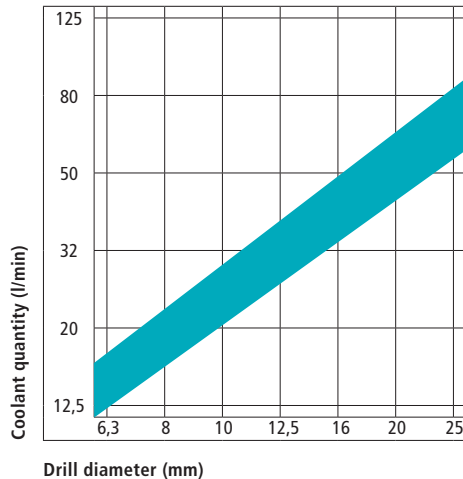

Coolant pressure

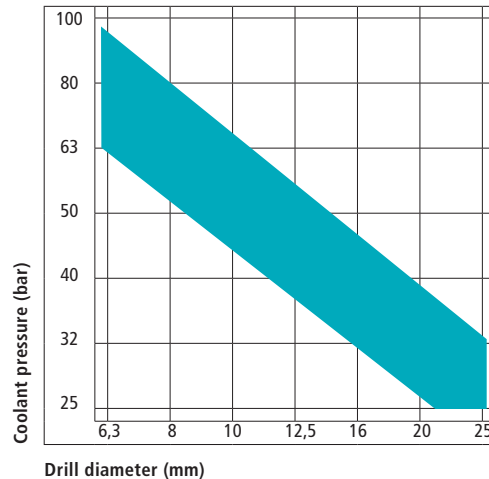

Reliable chip removal is only assured if sufficient coolant is supplied to the tool. The diagrams show our recommendation for coolant pressure and quantity by drill diameter.

The ideal **viscosity of deep-hole drilling oil** should be  $15 \text{ mm}^2/\text{s}$  (60 - 70 SUS) at  $40^\circ\text{C}$  for drilling diameters up to 18 mm.

When using emulsion, the specified pressures (p) may be reduced by up to  $\sim 20\%$ .


**For all drill diameters filtering is required between  $5 \mu\text{m}$  and  $20 \mu\text{m}$ .**

# Technical information

## Regrinding instruction for standard nose grind

### Type 120/Type 123

#### Regrinding instruction


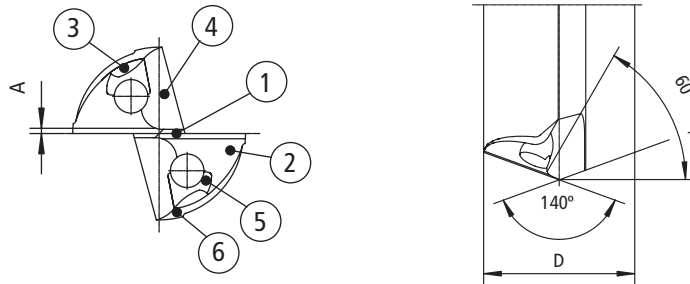


#### Fixture settings and grinding sequence

Operation	Swing 	Tilt 	Torsion 	Gage	Remarks
1	20°	10°	0°	A	cutting land 2 <sup>nd</sup> edge 180°
2	20°	Ø 3.000 - 6.009 25° Ø 6.010 - 25.000 20°	0°		relief angle 2 <sup>nd</sup> edge 180°
3	10°	35°	0°		relief angle 2 <sup>nd</sup> edge 180°
4	60°	0°	grinding wheel 15°	Q	web thinning 2 <sup>nd</sup> edge 180°
5	15°	0°	0°		grinding into half of the coolant hole
6	60°	0°		C	grinding land hand chamfer

#### Dimensions (mm)

Drill-Ø	A Cutting land	Q Web thickness + 0.1	C Chamfer	R Radius
3.000 - 6.009	0.4	0.4	0.5	1.0
6.010 - 10.009	0.4	0.5	0.5	1.0
10.010 - 15.009	0.5	0.6	0.6	1.5
15.010 - 20.009	0.6	0.8	0.7	2.0
20.010 - 25.000	0.7	0.9	0.8	2.5




## Technical information

### Service

#### Coating

botek offers prompt and cost effective in house coating service.

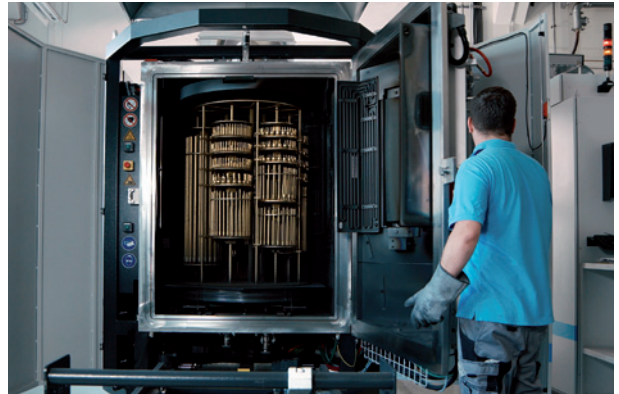

#### Regrinding


botek offers prompt and cost effective in house regrinding service.







#### Re-tipping

Tools get equipped with a new drill head (requirement is that drill tube and driver can be used).

**Please send us your inquiry.**

**If you have any questions, please do not hesitate to contact us or refer to: [www.botek.de](http://www.botek.de).**

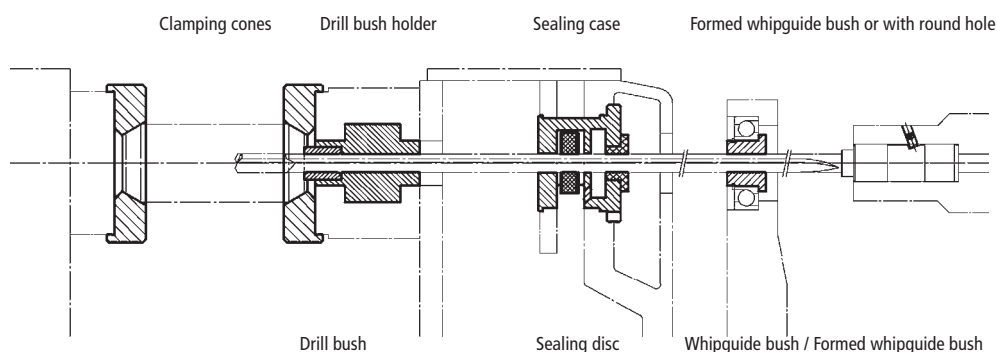

Whipguide bush with round hole	Tool diameter (mm)	D	L	I1	d	Drawing no.	botek order no.	
	1.850 - 15.399	25	22	12	Please specify <b>tool dia. and outer dia. (D)</b> when ordering	170-05-4-1060	792 000 509	
	1.850 - 25.609	30	26	16		170-05-4-1238	792 000 511	
	1.850 - 36.699	45	26	14		170-05-4-1341	792 000 512	
	1.850 - 25.609	35	26	14		170-05-4-2227	792 000 510	
	1.850 - 25.609	30	26	13		170-05-4-2278	792 000 513	
	1.850 - 36.699	45	26	16		170-05-4-2279	792 000 514	
	1.850 - 11.799	20	22	12		170-05-4-2650	792 000 508	
	1.850 - 32.609	40	26	15		170-05-4-3897	792 000 515	
Formed whipguide bush	Tool diameter (mm)	D	L	I1	d	Drawing no.	botek order no.	
	5.000 - 12.399	20	20	12	Please specify <b>tool dia. and outer dia. (D)</b> when ordering	170-05-4-1813	792 000 533	
	5.000 - 22.899	30	26	14		170-05-4-1814	792 000 522	
	7.800 - 27.000	45	26	16		170-05-4-1815	792 000 534	
Whipguide bush	Tool diameter (mm)	D	L	d		Drawing no.	botek order no.	
	1.850 - 12.399	22.6	15	Please specify <b>tool dia.</b> when ordering		170-05-4-1180	792 000 535	
Sealing disc	Tool diameter (mm)	D	L	d		Drawing no.	botek order no.	
	5.000 - 20.509	32	4	Please specify <b>tool dia.</b> when ordering		170-07-4-1417	792 000 531	
	5.000 - 27.000	40	4				792 000 532	
Special sealing disc	Tool diameter (mm)	D	L	d		Drawing no.	botek order no.	
	5.000 - 5.749	32	12	Please specify <b>tool dia.</b> when ordering		170-07-4-142204	792 000 527	
	5.750 - 6.749					170-07-4-142205		
	6.750 - 7.599					170-07-4-142206		
	7.600 - 8.699					170-07-4-142207		
	8.700 - 9.999					170-07-4-142208		
	10.000 - 11.299					170-07-4-142209		
	11.300 - 12.899					170-07-4-142210		
	12.900 - 14.399					170-07-4-142211		
	14.400 - 16.399	170-07-4-142212				792 000 528		
	16.400 - 17.899	170-07-4-142213						
	17.900 - 20.799	170-07-4-142214						
	20.800 - 22.899	170-07-4-142215						
	22.900 - 24.899	170-07-4-142216						
	24.900 - 27.000	170-07-4-142217						
Drill bushings to DIN 179A					d	Drawing no.	botek order no.	
	Cylindrical drill bushings to DIN 179-A in middle version made from hardened tool steel <b>Special drill bushings on request</b>			Please specify <b>tool dia.</b> when ordering		170-04		

## Machining accessories

### Axial-Pulsator


#### Axial-Pulsator

The botek „Axial Pulsator“ has been developed to increase the feed rate of straight fluted deep hole drilling tools, particularly drilling steel and other long chipping materials.

The typical quality characteristics of single flute and 2-flute gundrills like excellent surface finish, minimum run out, hole straightness and hole roundness and high process reliability can be achieved very economical in combination with the „Axial Pulsator“.


#### Large Pulsator

Drill diameter: 4.0 mm to 12.0 mm  
Max. speed: 6,000 RPM  
Adjustable only by manufacturer (only stroke)  
Ø: 70 mm  
Weight: 4.4 kg  
L: 160 mm

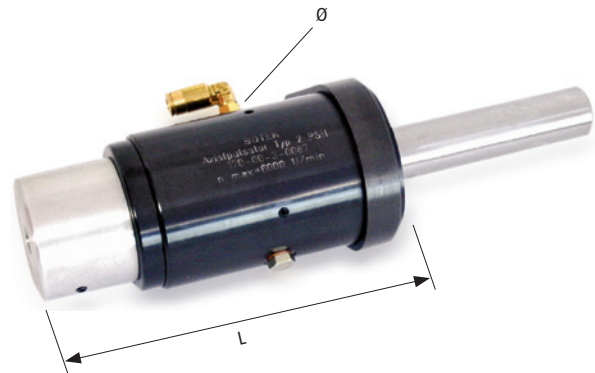

#### Small Pulsator

Drill diameter: up to 4.0 mm  
Max. speed: 11,000 RPM  
Adjustable stroke  
Ø: 50 mm  
Weight: 1.3 kg  
L: 140 mm

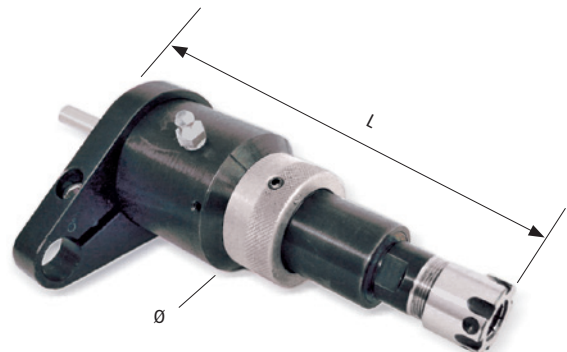

Alternative measurements on request.

#### Application example

Copper	without Pulsator	with Pulsator	with Pulsator
Tool	Single flute gundrill Type 110	Single flute gundrill Type 110	Solid carbide 2-flute drill Type 123
Diameter (mm)	8.0	8.0	8.0
V <sub>f</sub> (mm/min)	40	120	200
Steel	without Pulsator	with Pulsator	with Pulsator
Tool	Single flute gundrill Type 110	Single flute gundrill Type 110	Solid carbide 2-flute drill Type 123
Diameter (mm)	8.0	8.0	8.0
V <sub>f</sub> (mm/min)	90 - 100	150 - 180	200 - 1000

Above mentioned values are guide values which could differ from your application.

Do you have any questions?

Please call us at +49 7123 3808-0 and we will be happy to assist you.



## Drilling quality


To achieve optimum drilling results when using carbide tipped or solid carbide gundrills, various criteria must be applied. In addition to tool design, key factors are machine design and construction, process techniques, pressurized and filtered deep hole drilling coolant. Selection of proper cutting parameters is also a significant factor.

The key factors botek considers when designing gundrills:

- Material type
- Diameter, tolerance and surface finish
- Peripheral contour
- Carbide grade and coating
- Nose grind geometry

In addition to our refined manufacturing and technology for consistent product quality, our application and technical experience help you realize optimal solutions.

## Achievable drilling tolerances

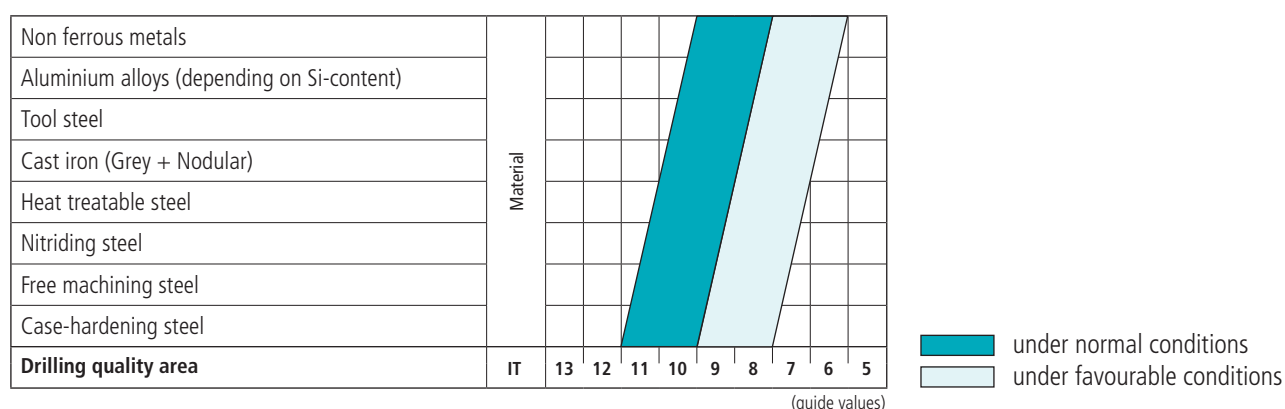

## Surface quality

Roughness class		N8	N7	N6	N5	N4	N3
Quality area							
Surface roughness values	Rt $\mu\text{m}$	21	11.5	6.2	3.4	1.9	1.0
	Ra $\mu\text{m}$	3.2	1.6	0.8	0.4	0.2	0.1
	Rz $\mu\text{m}$	14	7.6	4.5	2.2	1.2	0.65

(guide values)

under normal conditions
  under favourable conditions


**Drilling sequence:**

1. Drilling pilot hole (dimensions see table page 5).
2. Feed gundrill into pilot hole while non rotating or rotating slowly ( $< 50 \text{ U/min}$ ).
3. Switch on the coolant.
4. Switch on spindle rotation and feed.
5. After reaching the drilling depth switch off coolant and spindle rotation.
6. Switch off coolant.
7. Retract tool (maximum rotation not exceeding  $50 \text{ rev./min.}$  without support). Take care for safety information (page 18).

## Technical appendix


### Application notes

1. **Before using the drills make sure the machine has the necessary equipment to do proper deep hole drilling.** The machine should have suitable safety guarding for protection from cutting chips and coolant for operator. Check with machine builder!
2. **Improper use or handling of deep hole drilling tools can cause serious injuries**, e.g. skin cuts from the cutting edge.
3. Deep hole drilling tools are not self centering and can be unbalanced. Therefore the drills must be guided during the start of **the drilling cycle** by means of a sufficiently long drill bush or pilot hole.

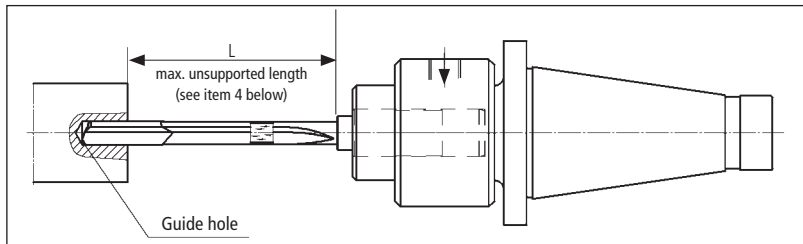


4. **Tool support: unsupported drill length (L)** should never exceed the dimensions as shown on table. If the unsupported drill length is exceeded the drill might cause injury.

**Maximum unsupported drill length (L) between the steady rests or in a guide hole.**

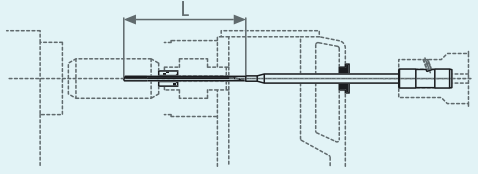	2-flute drill	Drill dia. = D (mm)	Maximum unsupported drill length (L)
	Solid carbide design	2.800 - 6.999	approx. 80 x D
		7.000 - 12.000	approx. 60 x D
	with brazed drill head	4.000 - 9.999	approx. 40 x D
		10.000 - 19.999	approx. 35 x D
		20.000 - 27.000	approx. 30 x D

**Example 1:** drill diameter, D = 2.0 mm, unsupported drill length up to maximum 80 mm = 40 x D  
**Example 2:** drill diameter, D = 2.0 mm x 200 mm OAL, 1<sup>st</sup> support at 80 mm and 2<sup>nd</sup> support at 160 mm

5. The gundrill is fed into a pilot hole **while non rotating** or rotated slowly at < 50 RPM (illustration). Then the coolant and the machine spindle should get started.
6. **After reaching the drilling depth** switch off the coolant and retract with the spindle stopped or slowly rotated at < 50 RPM.
7. Grinding of carbide produces dust (cobalt, etc.) that may be potentially hazardous. Use adequate ventilation and safety glasses during grinding.
8. **Consequences of not following** our application notes No. 1 - 7.

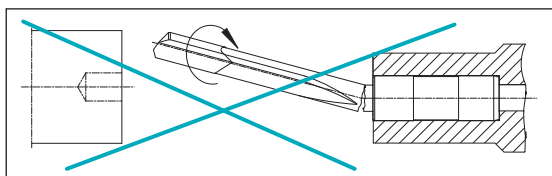

Using botek gundrills other than directed may cause personal injury.

Tool breakage and unsupported gundrills can be extremely dangerous.

**Please use with caution and care.**

**Please note that all application notes and values contained herein are intended as guidelines only. We do not accept any liability for damages caused by improper handling of botek deep hole drilling tools, operating errors, unsuitable machinery or misuse while using our tools!**

If you have any questions, please do not hesitate to contact us. P: +49 7123 3808-0.

**FAX to +49 7123 3808-138**

☐ **Inquiry**

☐ **Order** (please mark with a cross where applicable)

Customer ID: \_\_\_\_\_

Order No: \_\_\_\_\_

Address: \_\_\_\_\_

Shipping address: \_\_\_\_\_


Name Customer: \_\_\_\_\_

Phone: \_\_\_\_\_

Drill Type: ☐ Type 120 ☐ Type 123  
☐ Type 122 ☐ Type 123-01  
☐ Type 125 ☐ Type 123-02

Driver: ☐ Driver no. \_\_\_\_\_  
(see botek order no. in catalogues)  
☐ without driver  
☐ Special driver (please supply information on dimensions and version)

Tool dimensions  
(please fill in)

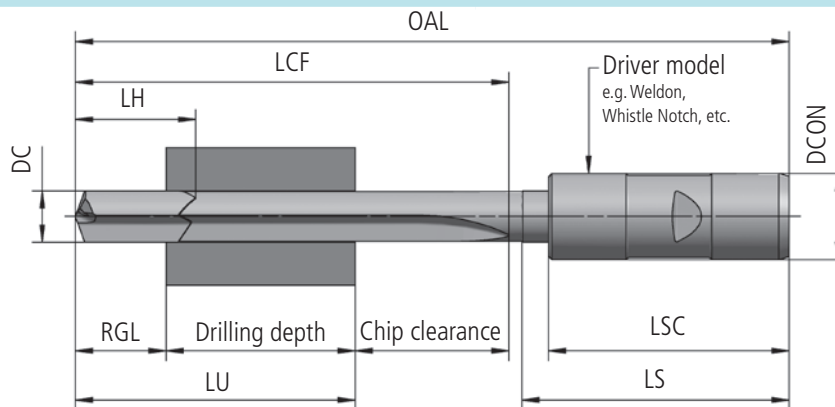

### Cutting tool data according to ISO 13399

OAL = Overall length  
 LCF = Length chip flute  
 LH = Head length  
 DC = Cutting diameter  
 RGL = Regrind length  
 LU = Usable length  
 (max. recommended)  
 LSC = Clamping length  
 LS = Shank length  
 DCON = Connection diameter

### Calculation of tool length (mm)

Drill diameter	2.80 - 3.99	4.00 - 5.99	6.00 - 8.99	9.00 - 12.99	13.00 - 17.99	18.00 - 23.99	24.00 - 27.00
Regrind approx.	12	15	20	25	30	35	40
Clearance approx.	10	15	20	30	40	50	60

### Nose Grinds

#### Standard nose grind

You will find details of botek grindings in our gundrill brochure and under [www.botek.de](http://www.botek.de). You can also request this information directly from botek.

☐ Special grind (as per drawing)


### Coating

Coating type: \_\_\_\_\_

Drill hole diameter \_\_\_\_\_ mm

Material \_\_\_\_\_

Material no.: \_\_\_\_\_ Description: \_\_\_\_\_ Hardness: \_\_\_\_\_

### Machine/coolant

☐ Gundrilling machine ☐ Deep-hole drilling oil  
☐ Machining centre ☐ Emulsion (min. 10%)

Coolant pressure(p): \_\_\_\_\_ bar

Notes, additional information (on machining, use, material, etc.)

Quantity \_\_\_\_\_

piece(s)

Delivery date

week: \_\_\_\_\_

Date: \_\_\_\_\_ Signature: \_\_\_\_\_

You will find a special inquiry sheet for new tool design or tool redesign under [www.botek.de](http://www.botek.de). Stock program: While stock lasts - Subject to prior sale



DEEP HOLE DRILLING SYSTEMS  
SOLID CARBIDE TOOLS

botech  
Präzisionsbohrtechnik GmbH

Längenfeldstraße 4  
72585 Riederich  
Germany

**P** +49 7123 38 08-0  
**F** +49 7123 38 08-138

Info@botech.de  
www.botech.de

